

L13

600PS [441kW] acc. to ISO 3046



12.7 Liter Light Duty Commercial Engine

The Electronic Unit Injection system delivers 600PS and 232kg-m of torque from the 12.7 liter in-line 6 cylinder engine.

The robustly-designed unit was specifically conceived as a light duty engine with the ability to serve the professional and commercial markets. It has stable performance at high load and responds well to sudden load changes.

Excellent power and torque in a wide rpm range proves Hyundai SeasAll's diesel development capabilities are world-class and beats the performance of competition's comparable models. Economy is assured by the state-of-the-art fuel management system featuring electronic unit injectors (EUI).

Technical Descriptions

Engine

- 6 cylinder in-line, 24-valve OHC
- Cast iron cylinder block and cylinder head
- Gallery oil-cooled long lasting mono steel pistons
- Integrated water jacket
- Single serpentine belt system
- Drive belt auto tensioner

Engine Mounting

- Adjustable engine mounts (Optional)

Lubrication System

- Gear-driven engine oil pump
- Closed system with forced feeding
- Integrated oil-cooler in cylinder block
- Easily exchangeable oil filter cartridge
- Eco type oil filter
- Washable auxiliary cyclone oil filter
- Electric oil extraction pump

Fuel System

- Electronic Unit Injector (EUI)
- Gear-driven fuel pump
- Electronically controlled injection timing
- Fine fuel filter and water separator
- High pressure six-hole injector nozzles

Electrical System

- 24 volt - 90A alternator
- Auxiliary engine stop button
- Air heating system for a trouble-free cold start
- NMEA2000 Converter (Optional)
- 2 Pole system (Optional)

Cooling System

- Gear-driven seawater pump
- Seawater-cooled intercooler, heat exchanger
- Auxiliary connector for cabin heating
- Corrosion resistant material for seawater circuit
- Easily accessible rear mounted sea-water pump

Exhaust System

- Coolant cooled exhaust manifold

- Cast iron exhaust pipe
- WGT (Waste Gate Turbocharger)

Instrument Box Assembly



- Engine self-protection and diagnosis
- Displays CAN information
- Displays engine diagnostic error codes
- Audible alarm and control lamps
- Idle & PTO rpm adjustable switch

Air Inlet system

- Reusable air filter
- Intake Extension Kit(Optional)

Emissions

- IMO Tier II NOx

Scope of Supply

	RATINGS ¹	OPERATION MANUAL	INSTRUMENT BOX ASSEMBLY (WITH EO) ³	SeasLink	BELT COVER **	EXHAUST PIPE	SEA WATER PUMP	TWO-POLE INTAKE EXTENSION KIT * (INSULATED SYSTEM)	NMEA2000 CONVERTER **	SAFETY STOP SWITCH
L600 S2	●	●	●	●	●	○	○	○	○	

● : Standard / ○ : Option / P = Propeller Shaft / G = For Generator

1. RATINGS


S2 MEDIUM DUTY COMMERCIAL

3. INSTRUMENT BOX ASSEMBLY includes

EOI BOX, RPM GAUGE and WIRING HARNESS

* Factory-installed option, ** Standard or optional depending on market.

To find out more about configurations and accessories available, please contact your nearest Hyundai SeasAll network.

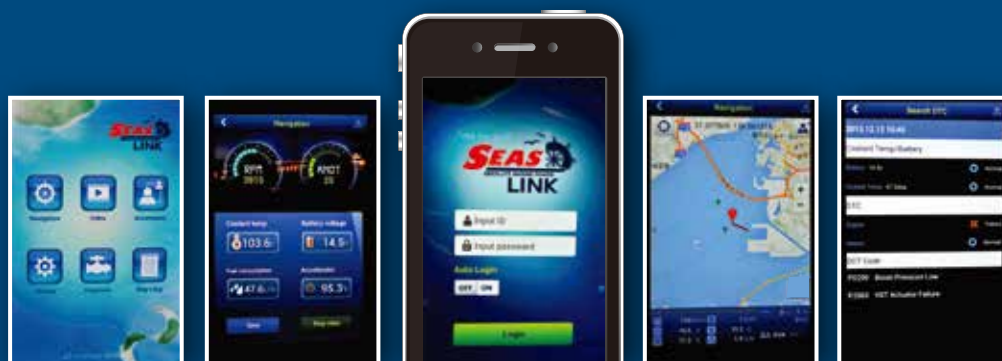

SEAS LINK
ABSOLUTE MARINE POWER

ON THE SMARTER PHONE


- Displays Engine Information
- Displays Boat Track on the Map
- Monthly User's Log Information
- Engine Diagnostic Functions
- Audible Warning Alarm and Visual Pop-up Screen



Specifications

Engine type	L600
Propulsion system	Shaftdrive & Waterjet
Engine Duty Rating	Medium Duty(S2)
Configuration	4-Stroke, 24-Valve OHC WGT with Intercooler, Fresh Water Cooling
Output [PS (kW)]	600 (441)
Rated rpm	2,000
Cylinders	In-line 6
Displacement [cc]	12,736
Bore X Stroke [mm]	130 X 160
Compression Ratio	16 : 1
Max. Torque @ rpm	232kg·m @1,100 ~ 1,300 rpm
Injection System	Electronic Unit Injector (EUI)
Alternator	24V-90A
Engine Diagnostics	YES
Fuel Consump.[L/h]	112
Dry Weight [kg]	1,320
Flywheel	SAE 14
Flywheel Housing	SAE 1

Performance Curves

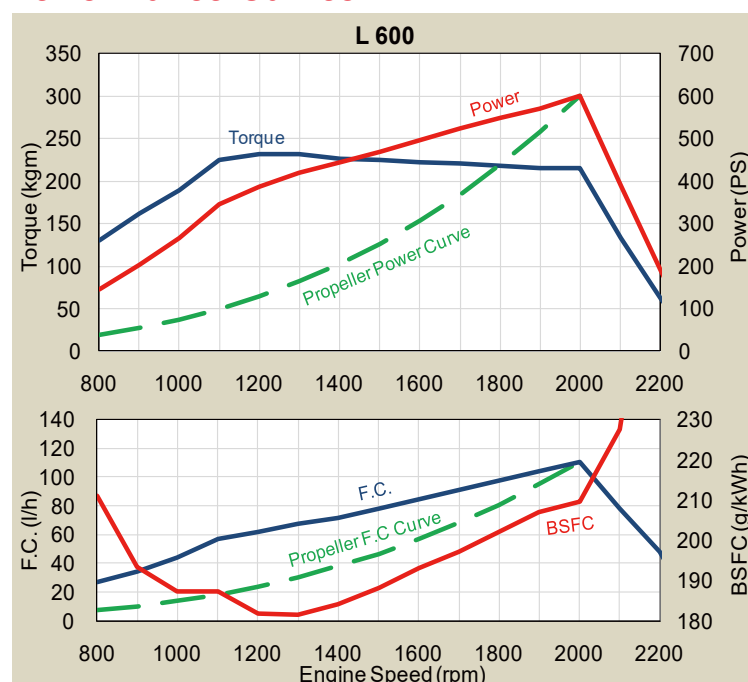

Dimensions

